


INDUSTRIES & APPLICATIONS




KEY FEATURES

- ◆ >95% Efficiency Rectifiers
- ◆ 45A / 2.4kW Capacity
- ◆ Remote Monitoring & Control
- ◆ Field Replaceable Controller
- ◆ Ethernet Comm. with SNMPv3
- ◆ 3 LED Alarm/Status Indicators
- ◆ 4 Form-C Relay Alarms
- ◆ 4 Load Breakers
- ◆ 1 Battery Breaker
- ◆ LCD Display/Touchpad

SAFETY CERTIFICATIONS

CAN/CSA C22.2 No 62368-1:2014
UL 62368-1:2014
EN 62368-1:2014/A11:2017

THREE YEAR WARRANTY

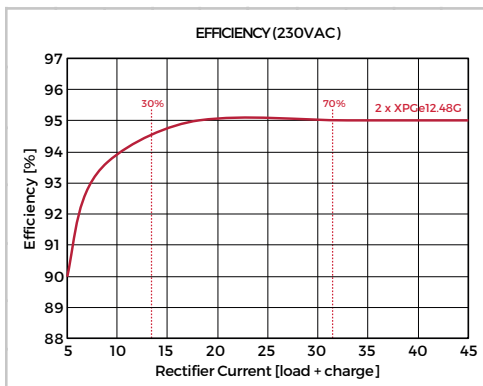

DESCRIPTION

Aspiro1U is a compact 1RU high 19/23" or ETSI rack-mounted, integrated DC power system providing an output of -48VDC. The system can accommodate 1 or 2 Aspiro family high efficiency hot-swap rectifiers. A total load + charge current of 45A/2.4kW is available. The rectifiers are internally fan cooled with speed control which is a function of load and temperature, keeping acoustic noise to a minimum.

The DC output circuits can provide up to 4 loads with breakers rated from 1A to 30A. An additional breaker provides battery protection. A programmable low voltage battery disconnect (LVD) is standard.

The ACX Advanced remote access controller monitors system parameters, controls rectifier output, and provides alarms for system failures. The Controller Module is also pluggable for easy field replacement in case of failure. There are 2 LED alarm indicators which indicate failures, (RED) Alarm and (YELLOW) Message. A third green LED indicates the controller is working properly. As standard four form-C relay outputs provide the alarms for remote use. Two digital inputs and outputs are also provided as well as a microSD card slot that accepts an up to 4GB card which is sufficient for more than 20 years data logging.

The system can be programmed by means of a remote PC web page display. Communication is by Ethernet LAN with SNMPv3 including alarm trapping. It also has provision for temperature compensated charging of an external battery using a supplied TC probe. An LCD Display/Touchpad is included for local metering, status, and setup.

The Aspiro 1U is compatible with UNIPOWER's free [PowCom™ software](#) which offers local and remote management through an advanced Windows GUI.

SYSTEM SPECIFICATION & CAPABILITY GUIDE

SYSTEM DESIGNATION	ASPIRO 1U - M00035			
OUTPUT				
System Voltage	-48VDC nominal 53.5V float			
Maximum Power @ 120VAC nom.	1600W			
Maximum Power @ 230/400VAC nom.	2400W			
Maximum Current @ 120VAC nominal	Load	23A @90-100VAC, 25A @ 100-180VAC		
	Battery	25A discharge s/w controlled (deducted from load capacity)		
Maximum Current @ 230/400VAC nominal	Load	45A		
	Battery	45A discharge s/w controlled (deducted from load capacity)		
No. Rectifier Slots	2			
DC DISTRIBUTION				
Loads Circuits	4 x Breakers 1A to 30A (see configuration guide on page 5)			
Battery Circuits	1 x 40A to 65A (see configuration guide on page 5)			
INPUT				
Voltage (nominal)	1-phase 100-120/200-240VAC (L + N + PE) 2 x 1-phase 100-120/200-240VAC (L + N + PE)			
Frequency	47-63Hz			
Maximum Input Current	1-phase - 16A 2-phase - 8A each input		1-phase - 9A 2-phase - 4.5A each input	
Rectifier Power Factor	>0.98 (typical)			
MONITORING & CONTROL (ACX Advanced Controller)				
Alarm Relays	4			
Local Interface	4 x 20 LCD, 4-key menu, USB / RS232, microSD card slot (4GB max,) for data logging			
Remote Interface	Ethernet / Modem using PowCom™ software package Ethernet port allows monitoring and control over a TCP/IP network. Web browser support + SNMPv3			
LED Indications	Green - System ON; Yellow - Message(s); Red LED - Alarm(s)			
External Digital I/O	2 x Inputs, 2 x Outputs (Open Collector)			
BATTERY MANAGEMENT				
Symmetry Inputs	6 or 12 (can be redefined as analog inputs up to 100VDC)			
Low Voltage Battery Disconnect (LVBD)	1 x 80A Programmable			
Temperature Compensated Charging	Programmable			
COMPLIANCE				
EMC	EN 300 386 ; EN61000-6-3 (Emission) ; EN61000-6-2 (Immunity)			
Safety	CAN/CSA C22.2 No 62368-1:2014, UL 62368-1:2014, EN 62368-1:2014/A11:2017			
ENVIRONMENTAL				
Operating Temperature	-40°C to +55°C			
Storage Temperature	-40°C to +85°C			


RECTIFIER MODULES vs. SYSTEM CAPACITIES

RECTIFIER MODULES (float voltage 53.5V)						SYSTEM CAPACITY			
MODEL NUMBER	EFFICIENCY ¹	INPUT VOLTAGE ²	INPUT CURRENT ³	OUTPUT POWER	OUTPUT CURRENT	MAX. LOAD CURRENT STANDARD VERSION		MAX. LOAD CURRENT LOW POWER VERSION ⁵	
						TOTAL	1+1 ⁴	TOTAL	1+1 ⁴
XR08.48G	>90.0%	85-275VAC	10.5A/4.9A	800W	15.0A	30.0A	15.0A	15.0A	7.5A
XPGe12.48G	>95.0%	90-180VAC	7.3A	600W	11.2A	22.4A	11.2A	15.0A	7.5A
		180-275VAC	7.0A	1200W	22.4A	44.8A	22.4A	15.0A	7.5A


Notes:

1. When operating at 230VAC.
2. All models will operate over the full range, automatically limiting output current/power according to the actual input voltage range applied.
3. Input currents shown are expected maximums at 90VAC/180VAC as appropriate.
4. Figures quoted are at 110VAC input. See separate rectifier datasheets for details.
5. May required reduction in maximum charge current when batteries not fully charged.
6. The Low Power Version is configured with a 20A shunt to improve measurement resolution when using a small (~10Ah or less) battery.

FRONT PANEL DESCRIPTION

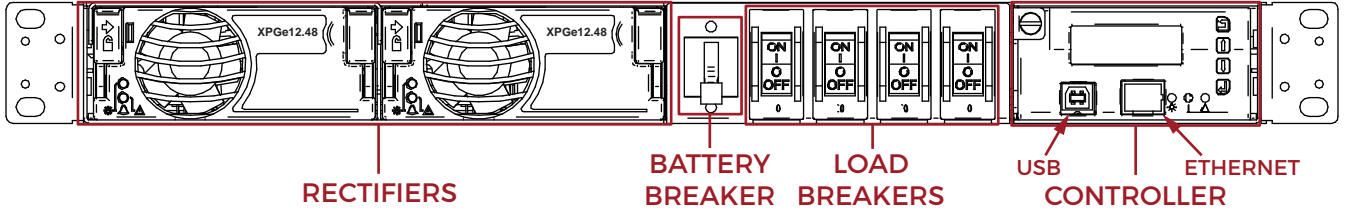

REAR PANEL DESCRIPTION

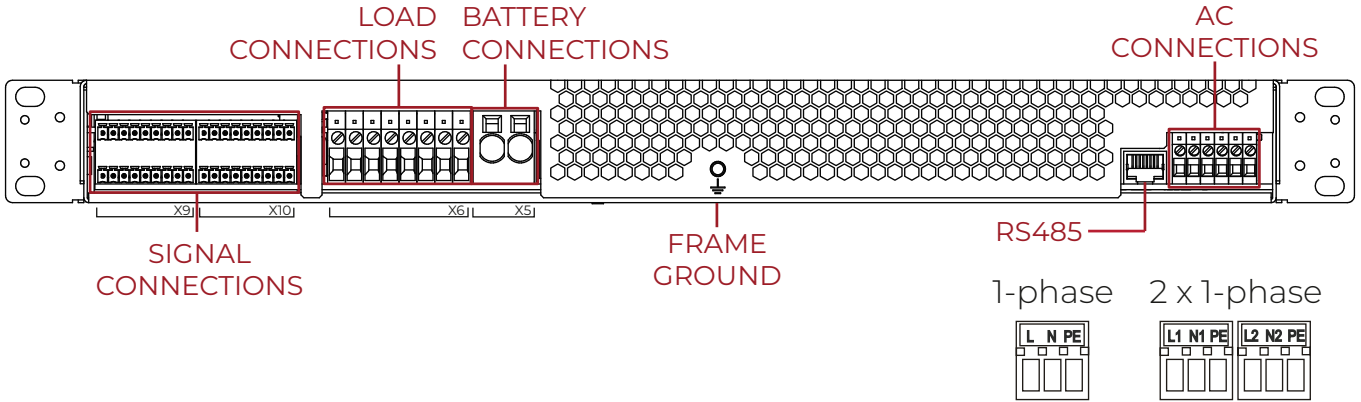


Note that when the 1-phase configuration is selected only the left hand set of 3 terminals is present and this is connect to both rectifier positions within the unit.

WEIGHTS & DIMENSIONS


UNIT	UNIT				PACKAGED				
	Width	Height	Depth	Weight	Width	Height	Depth	Weight	# in box
System Unit (19" Mounting)	18.90 (480.1)	1.72 (43.6)	10.41 (264.5)	9.5 lbs (4.3 kg)	23.2 (589)	7.9 (200)	15.3 (387)	11 lbs (5 kg)	1
System Unit (ETSI Mounting)	21.10 (535.0)								
Rectifier Module	4.0 (102)	1.6 (41)	9.0 (229)	2.4 lbs (1.1 kg)	6.0 (152)	2.2 (55)	11.5 (291)	2.6 lbs (1.2 kg)	1

Dimensions in inches (mm)

DETAILED DIMENSIONS (19/23")

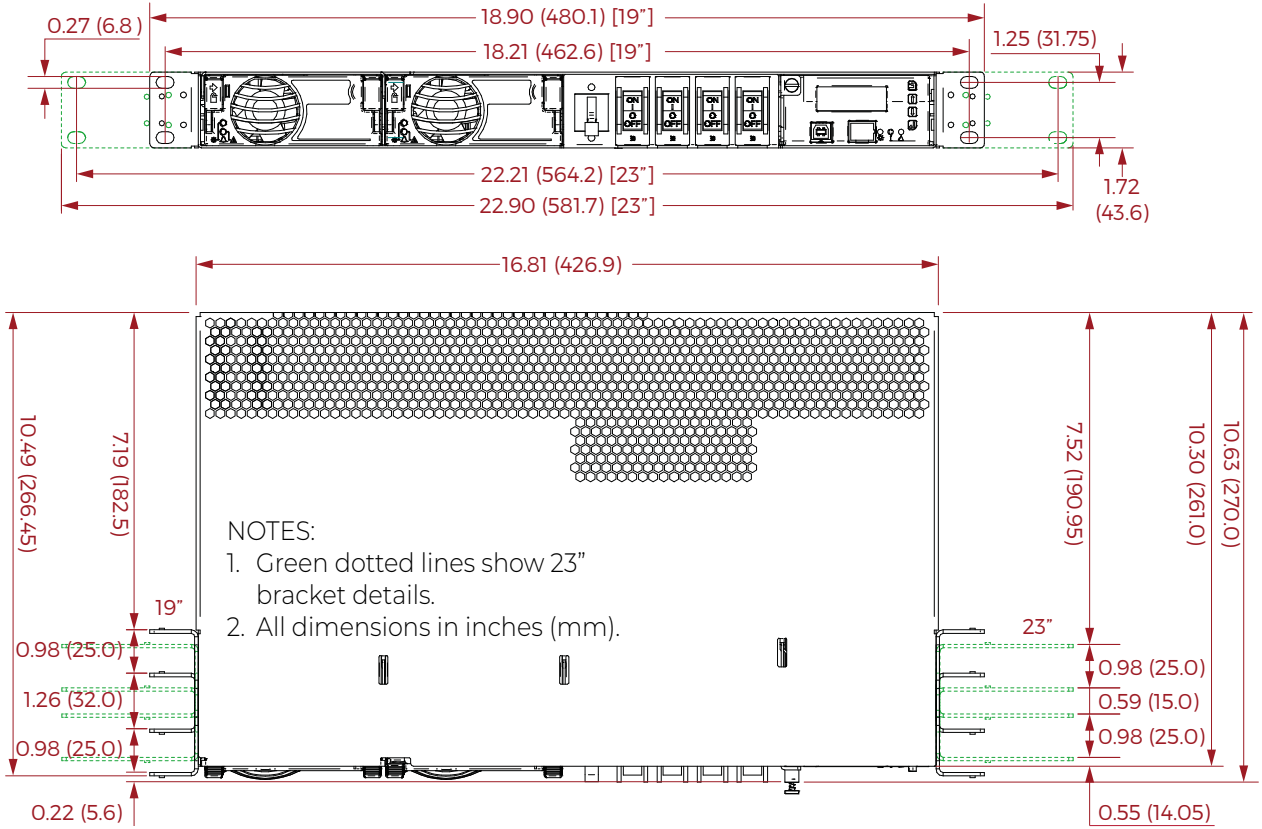

DETAILED DIMENSIONS (ETSI/21")

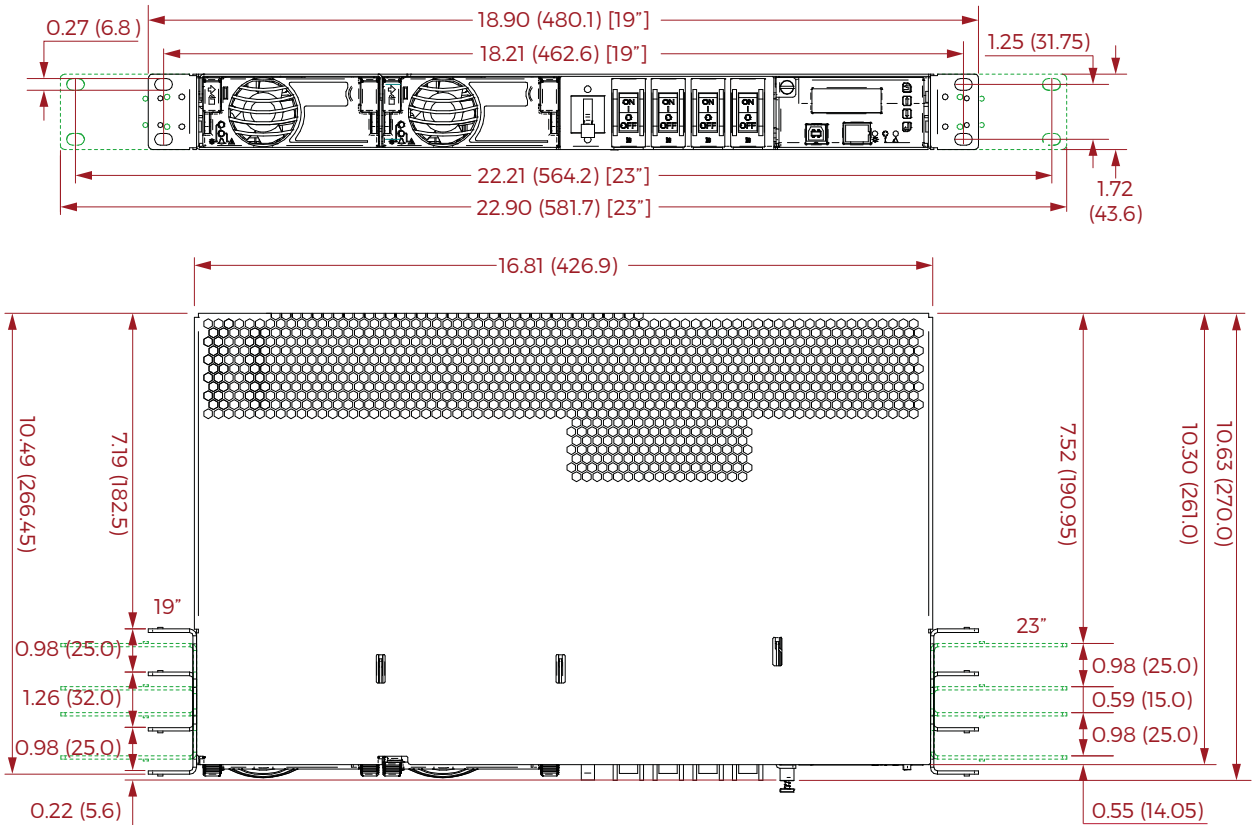

PRE-CONFIGURED STOCK MODELS

(normally held in stock for immediate delivery)

ORDER CODE	DESCRIPTION
M00035*900041	Single Feed (1-phase), ACX Controller, 65A Battery Breaker, Load Breakers: 30A/20A/15A/10A, 19/23" Mounting Brackets, 3m Temp. Sensor Cable [x1], 3m Symmetry Cable [x1]. [Rectifiers & blanking modules must be ordered separately.]
M00035*900018	Dual Feed (2-phase), ACX Controller, 65A Battery Breaker, Load Breakers: 25A/20A/15A/10A, 19/23" Mounting Brackets, 3m Temp. Sensor Cable [x1], 3m Symmetry Cable [x1]. [Rectifiers & blanking modules must be ordered separately.]
XR08.48G	Rectifier module - 17 Amp [IMPORTANT - install only the same type and rating rectifiers in each system.]
XPGe12.48G	Rectifier module - 25 Amp [IMPORTANT - install only the same type and rating rectifiers in each system.]
XB-01-G	Rectifier blanking module [Must be ordered to fill unused rectifier positions.]

NON-STOCK CONFIGURATION GUIDE

(normally configured from stock 'base' units)

PLEASE COMPLETE THE BELOW TABLE AND SUBMIT TO UNIPOWER FOR VERIFICATION AND CONF. NO. ALLOCATION (This form is fully interactive and may be completed electronically OR it can be printed and completed by hand)	
STEP 1 - CUSTOMER DETAILS	
Company: _____ Address: _____ _____ Zip Code: _____ Country: _____	Contact Name: _____ Email Address: _____ Telephone: _____ Quantity for quotation: _____
STEP 2 - INPUT TYPE - Choose one version	
1-Phase (120/240V) 2-Phase (120/240V)	1-phase OR 2-phase
STEP 3 - RECTIFIER MODULES - Choose one type only and enter quantity 1 or 2 - XB-01-G blanking modules will be inserted into unused slots	
XR08.48G - 800W / 18.2A - >90% Efficiency XPGe12.48G - 1200W / 22.6A - >95% Efficiency	Qty 1 OR Qty 2 OR Qty 1 OR Qty 2
STEP 4 - BATTERY BREAKERS - Choose rating and quantity or NONE	
No Breakers [PLEASE CHECK WITH SALES FOR AVAILABILITY] OR 40A x1 OR 50A x1 OR 65A x1	None OR Qty 1 OR Qty 1 OR Qty 1
STEP 5 - LOAD BREAKERS - Choose quantity for desired ratings. Maximum 4 for breakers, positions not filled will have a blank fitted. [Configuration will be checked by UNIPOWER]	
BREAKERS - 4 max. total 1A single pole - quantity ____ 15A single pole - quantity ____ 4A single pole - quantity ____ 20A single pole - quantity ____ 5A single pole - quantity ____ 25A single pole - quantity ____ 7.5A single pole - quantity ____ 30A single pole - quantity ____ 10A single pole - quantity ____	
STEP 7 - TEMPERATURE SENSOR - available for battery and ambient temperature measurement	
Battery Temperature Sensor - 1.9m (~6ft) OR 3.0m (~10ft) Ambient Temperature Sensor - 1.9m (~6ft) OR 3.0m (~10ft)	NONE OR 1.9m (~6ft) OR 3m (~10ft) NONE OR 1.9m (~6ft) OR 3m (~10ft)
STEP 8 - SYMMETRY CABLES	
Symmetry Cable - 1.9m (~6ft) OR 3.0m (~10ft) - end measure	NONE OR 1.9m (~6ft) OR 3m (~10ft)
STEP 9 - MOUNTING BRACKETS	
19"/23" (allows front or mid fixed position mounting) OR ETSI (allows front or mid fixed position mounting)	19"/23" (standard in all regions) OR ETSI (optional in EMEA region only)
STEP 10 - OPTIONS & ACCESSORIES (Select required items)	
VDE w/Schuko 10A 3m (available in EMEA region only)	NONE OR YES
STEP 11 - SUBMIT COMPLETED FORM TO UNIPOWER FOR CHECKING AND ALLOCATION OF CONFIGURATION PART NUMBER	
Configuration Part Number: M00035_____ (leave blank for completion by UNIPOWER)	