

#### DESCRIPTION

UNIPOWER's Radian Series are hot-swappable, modular front-ends and rectifiers which produce up to 1200 watts output. There are 16 different models with different output voltages and power levels. The modules are ultra-compact with power density up to 17 watts per cubic inch. Companion 19-inch shelves hold up to three rectifiers which can also be operated in a 2+1 redundant mode. The modules have automatic load sharing and output ORing diodes so they can be hot-swapped while the system is operating. Module output voltage can be controlled by 0V to +5V analog input.

Green LEDs indicate AC and DC power good. The rectifiers also have control and monitoring features and a +5V standby output. Operating temperature range is -20°C to +70°C.

#### FEATURES

- ◆ 1U- High: 1.72"
- ◆ -20°C to +70°C Operation
- ◆ 85 to 264VAC or 90 to 420VDC Input
- ◆ Up to 1200W Module Output
- ◆ Up to 4080W Shelf Output
- ◆ 0.99 Power Factor
- ◆ Output Voltages: 12 to 54.4VDC
- ◆ 80-87% Efficiency
- ◆ Power Density to 17W/Cu. Inch
- ◆ Hot Swappable
- ◆ Integral ORing Diodes
- ◆ Class B EMI Filter
- ◆ LED Indicators
- ◆ I<sup>2</sup>C Serial Data Option
- ◆ 19- or 23-Inch Rack Mounting


#### THREE YEAR WARRANTY

#### SAFETY CERTIFICATIONS

UL60950-1 2<sup>nd</sup> Edition  
 CSA22.2, No. 60950-1 2<sup>nd</sup> Edition  
 EN60950-1 2<sup>nd</sup> Edition

[www.unipowerco.com](http://www.unipowerco.com)

North America & CALA: +1 954-346-2442 · EMEA: +1 561-990-3830 · [sales@unipowerco.com](mailto:sales@unipowerco.com)

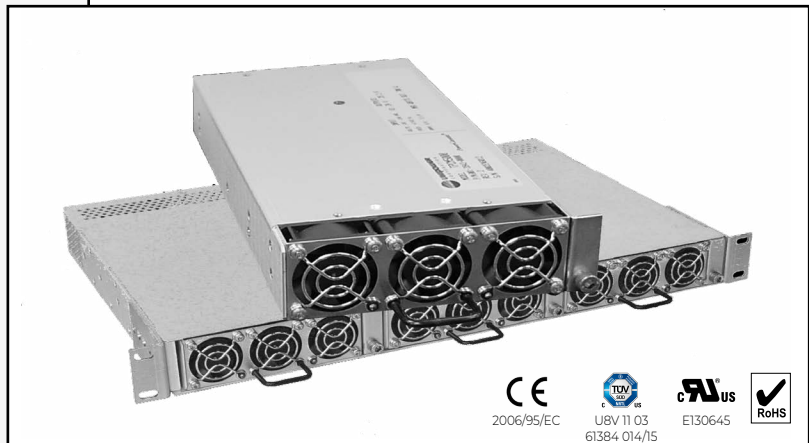

#### FRONT-END / RECTIFIER MODULES

MAX. POWER	OUTPUT VOLTAGE	OUTPUT CURRENT	AC INPUT VOLTAGE <sup>1</sup>	AC INPUT CURRENT <sup>2</sup>	MODEL NO. <sup>3</sup>
1200W 800W	54.4VDC	22.0A 15.0A	85-264V 85-264V	11.8A / 6.2A 7.9A / 4.1A	RPCP48/22 RPCM48/15
1200W 800W 600W	48.0VDC	25.0A 16.7A 12.5A	85-264V 85-264V 85-264V	11.8A / 6.2A 7.9A / 4.1A 5.9A / 3.1A	TPCP7000 <sup>4</sup> TPCM7000 <sup>4,5</sup> TPCM7000E <sup>4,5,6</sup>
690W	27.2VDC	25.0A	85-264V	6.6A / 3.5A	RPCM24/25
1000W	28.0VDC	35.7A	85-264V	9.6A / 5.0A	TPCP6000 <sup>4</sup>
1000W 700W 525W	24.0VDC	41.7A 29.2A 21.9A	85-264V 85-264V 85-264V	9.6A / 5.0A 6.7A / 3.5A 5.0A / 2.6A	TPCP5000 <sup>4</sup> TPCM5000 <sup>4,5</sup> TPCM5000E <sup>4,5,6</sup>
680W 600W	13.6VDC	50.0A 45.0A	85-264V 85-264V	7.1A / 3.7A 6.3A / 3.3A	RPCP12/50 RPCM12/45
800W 650W 480W	12.0VDC	66.7A 54.2A 40.0A	85-264V 85-264V 85-264V	8.3A / 4.4A 6.8A / 3.5A 5.0A / 2.6A	TPCP3000 <sup>4</sup> TPCM3000 <sup>4,5</sup> TPCM3000E <sup>4,5,6</sup>

#### Notes:

1. All units will also operate from 90-420VDC. Use model TPCPRIU3A shelf.
2. Input currents shown are nominal values at 120VAC/240VAC as appropriate.
3. To specify I<sup>2</sup>C Serial Communications append -Z to the model number. Not available for RPCM/RPCP.
4. For chassis-mount applications delete leading 'T' from model number, e.g. PCM7000.
5. To specify reverse airflow (exhaust at front) add suffix -R. Derate output power 20%.
6. These models have a front panel mounted IEC60320-C14 inlet. Derate output power 16.6% when reverse airflow (option -D) is fitted.

#### MODULE ACCESSORIES

DESCRIPTION	PART NUMBER	
	UNIPOWER	POSITRONIC
Mating Connector	355-1597-0000	PCIB24W9F400A1
Evaluation Board	009-3850-0000	

#### 3-BAY 19" SHELF SYSTEM ORDERING GUIDE

MAX. POWER	DESCRIPTION	MAX. CURRENT	MODEL NO. <sup>1,2</sup>
2400W	IEC60320-C14 AC Input	163A	TPCMRIU3
4080W	Terminal Block AC or DC Input	200A	TPCPRIU3A
4080W	IEC60320-C20 AC Input	200A	TPCPRIU3B
4080W	Filtered IEC60320-C20 AC Input	200A	TPCPRIU3C

#### Notes:

1. Blanking kit for unused position, order pt. no. 775-1450-0000.
2. To specify I<sup>2</sup>C Serial Communications append -Z to the model number. Not available for RPCM/RPCP.

## SPECIFICATIONS, MODULE

Typical at Nominal Line, Full Load and 25°C Unless Otherwise Noted.

### INPUT

Voltage Range.....	See Model Table
Power Factor.....	>0.99
Total Harmonic Distortion, Max.....	5%
Frequency.....	47-63Hz
Inrush Current Limiting, Max.....	50A Peak
EMI Filter, Conducted.....	FCC20780 pt. 15J Curve B EN55022 Curve B
Fast Transients.....	EN61000-4-4
Surges.....	EN61000-4-5
Remote Adjust.....	0 to +5V
Input Protection <sup>1</sup> .....	Internal Fuse, 15A

### OUTPUT

Current & Voltage.....	See Table
Output Power.....	600-1200W
Voltage Adjustment Range.....	±5%
Standby Output.....	+5V@250mA
Line & Load Regulation, Max.....	2%
Holdup Time.....	20msec.
Overvoltage Protection.....	Latch Off
Filtering: Wideband Noise, 20MHz BW	
48V/54.4V.....	500mV pk-pk
24V/27.2/28V.....	250mV pk-pk
12V/13.6V.....	125mV pk-pk
Current Limit.....	105-110% Rated Current
Efficiency.....	80-87%

### SAFETY

UL60950-1 2<sup>nd</sup> Ed., CSA22.2 No. 60950-1 2<sup>nd</sup> Ed.,  
EN60950-1 2<sup>nd</sup> Ed.

### STATUS INDICATORS

AC GOOD.....	Green LED
DC GOOD.....	Green LED

### ALARM SIGNALS (Logic LO, TTL compatible)

ACOK.....	AC present, 5V standby operating
DCOK.....	output within -10% of nominal @ 48, 24 or 12VDC

### SERIAL COMMUNICATIONS

i2C.....	Optional, see selection guide
----------	-------------------------------

### ENVIRONMENTAL

Operating Temp. Range.....	-20°C to +70°C
	-40°C start-up, reduced performance
Output Current Derating.....	2.5%/°C, 50°C to 70°C
Storage Temp. Range.....	-40°C to + 85°C
Environment.....	Pollution Degree 2
Humidity.....	0% to 95%, Non-Condensing
ESD.....	Bellcore GR-1089-Core and EN61000-4-2
MTBF, 35°C (Bellcore).....	200,000 Hours
Cooling.....	Integral Ball Bearing Fans
Acoustic Noise @ 1m (module).....	70dB


### PHYSICAL SPECIFICATIONS

Case Material.....	Aluminum
Case Dimensions, Inches (mm).....	1.60 H x 5.00 W x 10.00 D (40.6 x 127.0 x 254.0)
Weight.....	3.15 lbs. (1.43 kg.)

### Notes:


1. External protection required when operating from HVDC.

## OUTLINE DRAWING

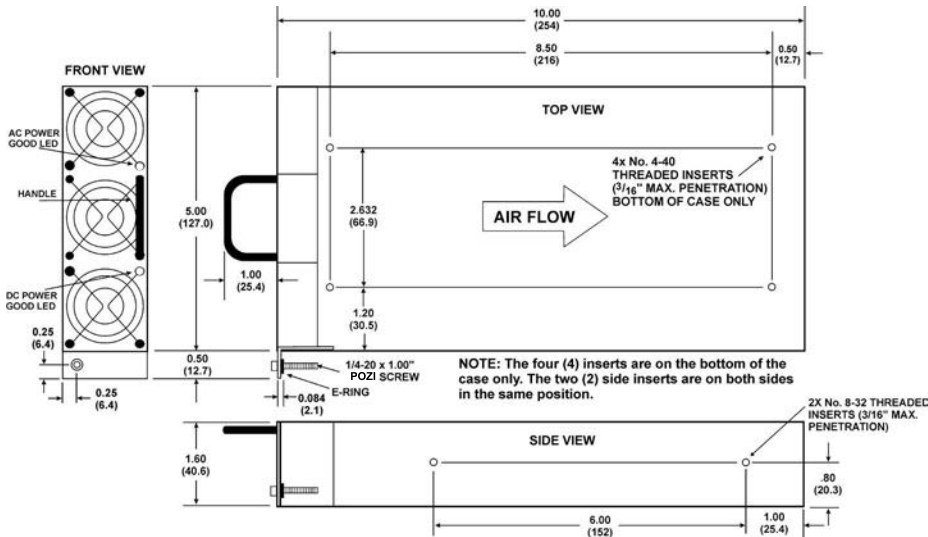

NOTE: Chassis mount units (see note 4 below model selection table on first page) are supplied without the extraction handle and locking bracket.

## REAR VIEW

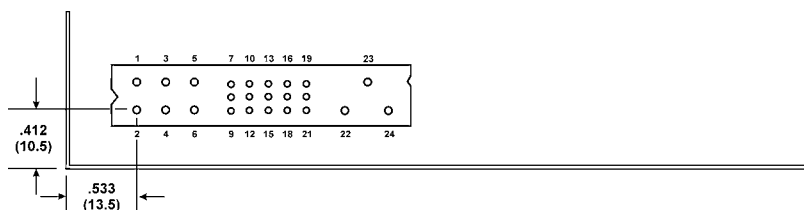


ALL DIMENSIONS IN INCHES (mm).

PIN CONNECTIONS			
PIN	FUNCTION	PIN	FUNCTION
1	+V Out <sup>1</sup>	13	Module Present
2	+V Out <sup>1</sup>	14	DC Good/GAI <sup>3</sup>
3	+V Out <sup>1</sup>	15	AC Good
4	V Return <sup>1</sup>	16	V Trim
5	V Return <sup>1</sup>	17	Overtemp. Warning/ GA0 <sup>3</sup>
6	V Return <sup>1</sup>	18	Current Share
7	Enable <sup>2</sup>	19	Current Monitor/ GA2 <sup>3</sup>
8	Sense +Ve	20	+5V Standby
9	Sense -Ve	21	Standby Return
10	Inhibit	22	Chassis Ground
11	Spare/SDA <sup>3</sup>	23	AC Line
12	Spare/SCL <sup>3</sup>	24	AC Neutral

### NOTES:

- For proper operation all +V out pins must be connected together and all V Return pins must be connected together.
- For unit to operate, pin 7 must be at logic LO or shorted to pin 9.
- These pins provide the i2C functions when option -Z is present. Pin 21 must be connected to pin 9 for i2C operation.

## FRONT VIEW (TPCMx000E)

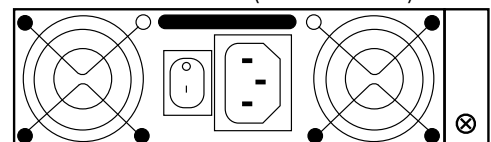

## I<sup>2</sup>C SERIAL BUS SPECIFICATIONS

Three forms of data are available via the I<sup>2</sup>C serial bus, allowing the user to monitor the actual status of an individual unit, manage system loading through measurement of the actual load on the output and also control inventory through an inbuilt EEPROM containing specific data about each individual unit. The implementation of I<sup>2</sup>C that has been utilized in Radian is a subset of more complete implementations such as IPMI. The following information provides the information required by the system designer to make decisions on how to utilize the available information within his overall system philosophy.

### I<sup>2</sup>C DEVICES EMPLOYED

PCF8574 - An 8-bit digital register manufactured by Philips.  
24C02 - A 256 byte EEPROM manufactured by ST.

PCF8591 - A Quad A/D converter manufactured by Philips.  
MAX6633 - A 12-bit temperature measurement device manufactured by Maxim.

For detailed information about the operation of these devices please consult the original manufacturers' datasheets.

## ELECTRICAL INTERFACE

### Addressing (GA0, GA1 and GA2)

Three external address lines are employed allowing up to eight Radian modules to be addressed on a single I<sup>2</sup>C bus. Module addressing is achieved through hard-wiring the address lines to -Sense or the +5V auxiliary supply via a 100-ohm resistor on the system back-plane. In this way it is the location or position of the module rather than any particular module that is identified by an individual address.

### Serial Clock (SCLK)

This line is clocked by the processor which controls the I<sup>2</sup>C serial bus. It should

be tied to +5V via a pull-up resistor in the range 3k to 10k.

### Serial Data (SDA)

This line is a bidirectional data line. It should be tied to +5V via a pull-up resistor in the range 3k to 10k.

### BUS speed

The I<sup>2</sup>C interface as used in Radian is designed to run with a serial clock speed 100kHz.

## OPERATION AND FUNCTION

### Digital Functions

Digital status functions are provided by a PCF8574 8-bit I/O port device. When this device is read by the serial bus controller a single 8-bit word provides the following information:

BIT	FUNCTION	GOOD STATE	MEANING
0	Input Power Fail	0	A "1" provides warning of input supply failure.
1	Output Power Good	0	Vout is within specified limits.
2	Temperature Warning	1	Temperature exceeds normal operating limit.
3	Fan #1 Good	1	Fan running at >80% nominal speed.
4	Fan #2 Good	1	Fan running at >80% nominal speed.
5	-	1	Not used
6	-	1	Not used
7	Temperature Alarm	1	Ambient temperature exceeds 70°C, unit switched off. Also indicates OVP and Inhibit activated.

### PCF8527 slave address

BIT	7	6	5	4	3	2	1	0
VALUE	0	1	0	0	A2	A1	A0	R/W

Note: If a zero is written to bit 7 in a data byte, the unit will be inhibited. The default state is enabled.

### EEPROM Functions

The EEPROM is a 2048 bit (256 byte) device which is preprogrammed at the factory with the following data:

ADDRESS RANGE	DATA
0-15	Model Number
16-31	Manufacturing Part Number
32-47	Serial Number
48-63	Modification Level
64-79	Manufacturer
80-95	Country of Manufacture
96-255	Not Used

Notes:  
Data is organized such that each field of data can be accessed by a page read (16 bytes).

Customers may specify other data to special order.

### EEPROM slave address

BIT	7	6	5	4	3	2	1	0
VALUE	1	0	1	0	A2	A1	A0	R/W

### Analogue Functions

Analogue status functions are provided by two PCF8591 4-channel 8-bit A/D converter devices. When these devices are read by the serial bus controller a single 8-bit word provides the following information:

Device: U1			
A/D	FUNCTION	A/D	FUNCTION
1	Vout voltage	3	not used
2	Vout current	4	not used

### PCF8591 slave address

BIT	7	6	5	4	3	2	1	0	Device
VALUE	1	0	0	1	A2	A1	A0	R/W	U1

The PCF8591 devices initially require a control byte (04 Hex) to be written to the configuration register. This control byte sets the device so that on each successive read the data from the next A/D is read. Note that on each read a conversion is started for a particular channel and the result will be read from the previous channel, thus the first result from a sequence of reads should always be discarded.

### A/D Converter Scaling

To obtain a correct voltage or current measurement it is necessary to employ a scaling factor in the controlling software. Note that all voltage measurements are made inside the PSU module, before the 'ORing' diodes, and are typically 0.5V higher than the actual module output voltage. The following calculation should be employed:

$$Value = (byte\ read \times scaling\ factor)$$

Output Voltage	Scaling	Tolerance	
48V	0.24	±2%	V Measure (U1 A/D Chan. 1)
48V	0.125	±10% *	I Measure (U1 A/D Chan. 2)

\* percentage of full scale

### Temperature Measurement Functions


The internal temperature of the unit is measured using a MAX6633. This device provides a 12-bit measurement at a resolution of 0.0625°C.

### MAX6633 slave address




BIT	7	6	5	4	3	2	1	0
VALUE	1	0	0	0	A2	A1	A0	0

## SPECIFICATIONS, RACKS/SHELVES

## REAR PANEL DETAIL

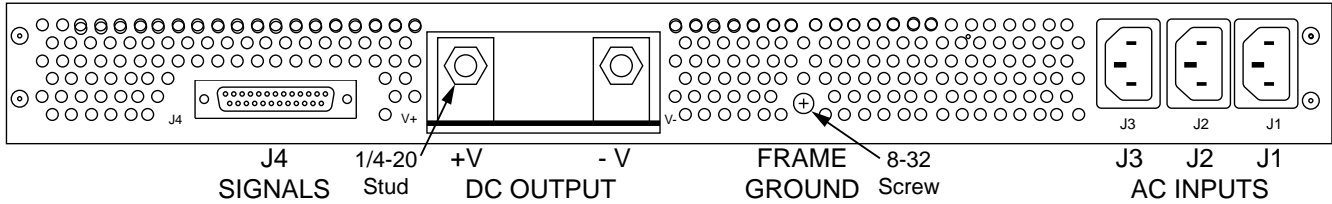**TPCMR1U3 - IEC60320-C13 Input**


USE WITH TPCM &amp; RPCM

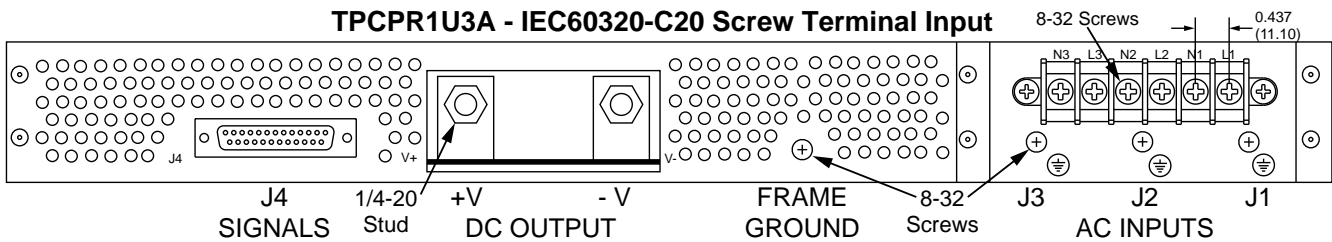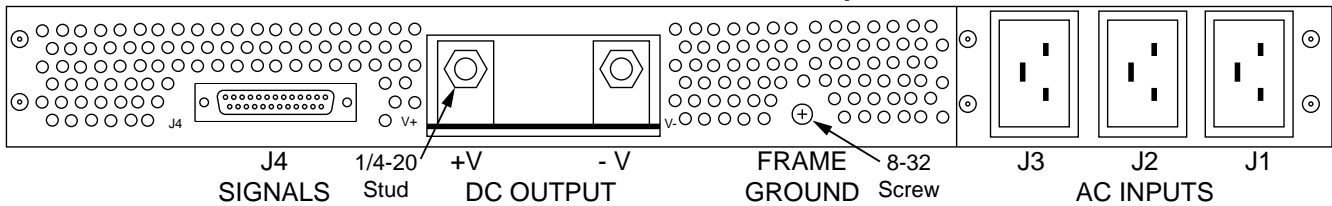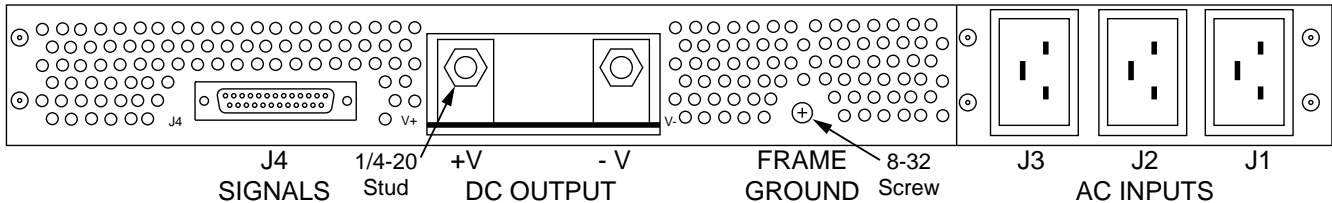**TPCPR1U3A - IEC60320-C20 Screw Terminal Input**

**TPCPR1U3B - IEC60320-C20 Input**

**TPCPR1U3C - IEC60320-C20 Filtered Input (extended chassis depth)**


WEIGHT

12.1 lbs. (5.5Kg)

USE WITH TCP &amp; RPCP


## J4 CONNECTION DETAILS

## NOTES:

- All electrical connections are made to the rear of the rack. There is one AC inlet for each module. Connector J1 goes to module A, connector J2 to module B and connector J3 to module C.
- Module A is on the left, module B in the center and module C on the right as seen from the rack front.
- The outputs of all modules are connected in parallel in the rack.
- Output terminals are on 1/4-20 Studs.
- The input voltage range is 85-264 for maximum power in either redundant or non-redundant operation.
- The Module Present outputs (J4 pins 20, 21 and 22) are grounded (to -Sense) when the module is plugged in and open when the module is out.
- Protective covers are provided as standard for the DC output terminals and the input terminal block inputs.
- For HVDC input applications TPCPR1U3A should be used.

SIGNAL CONNECTOR - J1			
PIN	FUNCTION	PIN	FUNCTION
1	Inhibit	14	AC Power Fail - A
2	Overtemp. Warning - A <sup>1</sup>	15	DC Power Good - A <sup>1</sup>
3	Current Monitor - A	16	AC Power Fail - B
4	Overtemp. Warning - B <sup>1</sup>	17	DC Power Good - B <sup>1</sup>
5	Current Monitor - B	18	AC Power Fail - C
6	Overtemp. Warning - C <sup>1</sup>	19	DC Power Good - C <sup>1</sup>
7	Current Monitor - C	20	Module Present - A
8	5V Standby <sup>2</sup>	21	Module Present - B
9	SDA	22	Module Present - C
10	Current Share	23	Sense -Ve
11	Sense +Ve	24	Remote Adjust - A
12	Remote Adjust - B	25	Remote Adjust - C
13	SCLK		


25-way D-type Socket



## NOTES:

- These pins are open when the I<sup>2</sup>C option is fitted.
- Referenced to Sense -Ve.

EXTENSION DETAIL  
(TPCPRIU3C SHOWN)



SHELF DIMENSIONS

MODEL NUMBER	HEIGHT	WIDTH	HOUSING EXTENSION	TOTAL DEPTH
TPCMRIU3	1.72" (43.7mm)	17.19" (437mm)	1.10" (27.9mm)	12.66" (332mm)
TPCPRIU3A			1.10" (27.9mm)	12.66" (332mm)
TPCPRIU3B			1.59" (40.4mm)	13.15" (334mm)
TPCPRIU3C			3.32" (84.3mm)	14.88" (378mm)

Front panel to back panel depth is 11.56 inches (294mm).  
Supplied with mounting kits for 19" and 23" relay racks / cabinets.

SHIPPING WEIGHTS  
Shelf: 15.0 lbs. (6.8Kg)  
Modules: 8.0 lbs. (3.6Kg)

SHIPPING DIMENSIONS  
Shelf: 22" (559mm) x 22" (559mm) x 3" (76mm)  
Module: 15" (381mm) x 7" (178mm) x 5" (127mm)

MAXIMUM OUTPUT CAPACITY









TPCMRIU3

3 MODULES NON-REDUNDANT			3 MODULES REDUNDANT		
VOLTAGE	CURRENT	POWER	VOLTAGE	CURRENT	POWER
12V	150.0A	1800W	12V	108.4A	1300W
24V	87.5A	2100W	24V	58.3A	1400W
48V	50.0A	2400W	48V	33.3A	1600W

























TPCPRIU3

3 MODULES NON-REDUNDANT			3 MODULES REDUNDANT		
VOLTAGE	CURRENT	POWER	VOLTAGE	CURRENT	POWER
12V	150.0A	1800W	12V	133.3A	1600W
24V	125.0A	3000W	24V	83.3A	2000W
48V	75.0A	3600W	48V	50.0A	2400W

ALARM & COMMUNICATIONS ADAPTORS

RELAY ALARM ADAPTOR	Part No.: 009-1005-0000 009-1011-0000 (with voltage trim)	Datasheet WEB Link	Notes
	Plugs directly into the 25 way D-Type signal connector J4 on the rack/shelf and converts the DC good signal for each power module to a Form-C volts-free relay contact output. The module allows daisy chaining of parallel connected shelves for share bus and remote sense. Part No. 009-1011-0000 includes an output voltage trim facility.		
SNMP ALARM TRAP ADAPTOR	Part No.: 009-1006-0000	Datasheet WEB Link	Notes
	Plugs directly into the 25 way D-Type signal connector J4 on the rack-shelf and monitors the DC Good signal of each power module. When an alarm occurs or clears a built-in processor sends an SNMP alarm trap to the monitoring host and can send an email message. Allows daisy chaining of parallel connected shelves for share bus and remote sense connections.		MIB files (.exe)  Setup guide 
MODULE EVALUATION BOARD	Part No.: 009-3850-0000	RADIAN Manual WEB Link	Notes
	Plugs directly into the Radian module connector to provide industrial connections for testing and evaluation. Provides AC in and DC out plus alarm connections. 2 LEDs: AC good, DC good.		See page 14 Fig. 5 for details.

AC CORDS & DC CABLE KITS

TPCMRIU3	AC LINE CORDS - 120V 15A	Part No.: 364-1412-0000	NEMA 5-15	IEC-C13
	One cord per power module for TPCMRIU3 shelf. Cord length 6ft (1.83m)			
	AC LINE CORDS - 240V 15A	Part No.: 364-1414-0000	NEMA 6-15	IEC-C13
	One cord per power module for TPCMRIU3 shelf. Cord length 6ft (1.83m)			
TPCPRIU3B & C	AC LINE CORDS - 120/240V 15A	Part No.: 364-1421-0000	ROJ-LEADS	IEC-C13
	One cord per power module for TPCMRIU3 shelf. Cord length 6ft (1.83m) REQUIRES CUSTOMER SUPPLIED PLUG			
	AC LINE CORDS - 120V 20A	Part No.: 364-1416-0000	NEMA 5-20	IEC-C19
	One cord per power module for TPCPRIU3B or TPCPRIU3C shelf. Cord length 8ft (2.44m)			
	AC LINE CORDS - 240V 20A	Part No.: 364-1413-0000	NEMA 6-20	IEC-C19
	One cord per power module for TPCPRIU3B or TPCPRIU3C shelf. Cord length 8ft (2.44m)			
	AC LINE CORDS - 120/240V 20A	Part No.: 364-1422-0000	ROJ-LEADS	IEC-C19
	One cord per power module for TPCPRIU3B or TPCPRIU3C shelf. Cord length 8ft (2.44m) REQUIRES CUSTOMER SUPPLIED PLUG			
	IEC CONNECTOR - 120/240V 20A	Part No.: 354-1716-0000	IEC-C19	
	Wireable free connector for TPCPRIU3B or TPCPRIU3C shelf.			
DC CABLE KIT - 1 to 1 LUG 30"	Part No.: 775-1497-1130	Start Lug	End Lug	
Pair of Black / Red #4AWG copper cable (600V 125A) 30" (76cm) with lug terminations and heat shrink. Single hole both ends. Hole size 0.25", tongue width 0.55".				
DC CABLE KIT - 1 to 1 LUG 84"	Part No.: 775-1497-1184	Start Lug	End Lug	
One pair Black / Red #4AWG copper cable (600V 125A) 84" (213cm) with lug terminations and heat shrink. Single hole both ends. Hole size 0.25", tongue width 0.55"				
DC CABLE KIT - 1 to 2 LUG 30"	Part No.: 775-1497-1230	Start Lug	End Lug	
Pair of Black / Red #4AWG copper cable (600V 125A) 30" (76cm) with lug terminations and heat shrink. Single hole one end, two hole one end. Hole size 0.25", tongue w = 0.55", spacing 0.625"				
DC CABLE KIT - 1 to 2 LUG 84"	Part No.: 775-1497-1284	Start Lug	End Lug	
One pair Black / Red #4AWG copper cable (600V 125A) 84" (213cm) with lug terminations and heat shrink. Single hole one end, two hole one end. Hole size 0.25", tongue width 0.55", spacing 0.625"				
DC CABLE KIT - 2 to 2 LUG 30"	Part No.: 775-1497-2230	Start Lug	End Lug	
One pair Black / Red #4AWG copper cable (600V 125A) 30" (76cm) with lug terminations and heat shrink. Two hole both ends. Hole size 0.25", tongue width 0.55", spacing 0.625"				
2-POST ADAPTOR	Part No.: 775-1495-0000			
Attaches to DC output bus bars to provide two post termination compatible with above 3 DC cable kits.				