



CUSTOM SOLUTION: ES24445

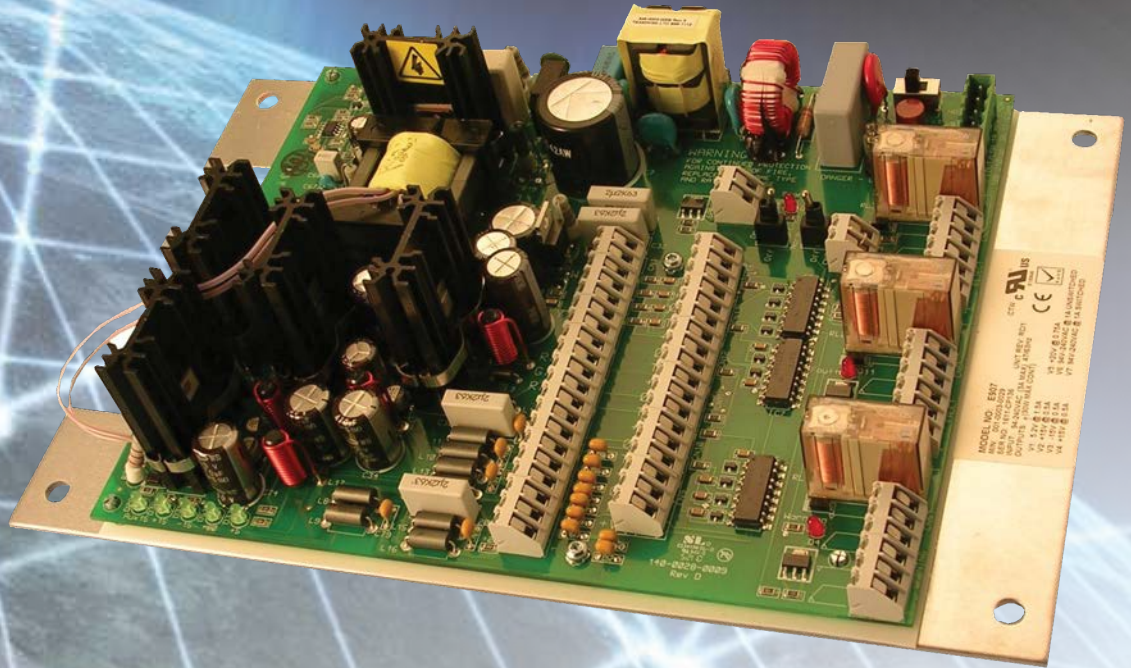

50 Watts, 7 Outputs
Includes User Control Interface
Ultra-Low Noise Outputs
High EMI Immunity
Customized Form Factor

CUSTOM SOLUTION: ES24445

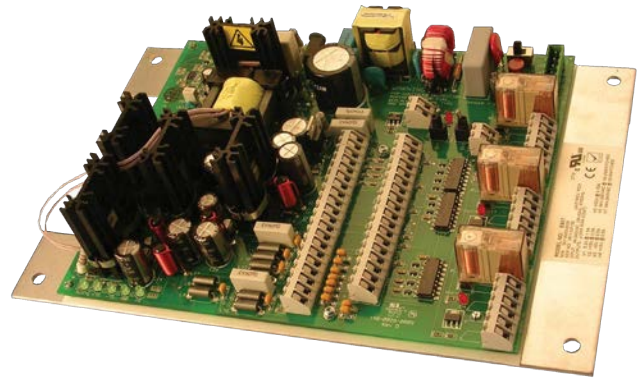

KEY SPECIFICATIONS

Input Range	85-264VAC
Input Frequency	47-63Hz
Output Power	50 Watts
Efficiency	87% @ 50% Load
Output Voltages	+5.2VDC +15VDC -15VDC +15VDC (unregulated) +20VDC 85-264VAC (switched) 85-264VAC (un-switched)
Holdup Time	20mS
Cooling	Convection
Protection	Overvoltage, Current Limiting, Short Circuit Overtemperature Shutdown
Control Outputs	4 Form-C Relays
Control Inputs	Relay Control & Switched Output
Safety Standards	UL60950-1, EN60950-1
EMI, Conducted & Radiated	FCC Part 15 Class B, EN55022 Class B
Reliability	200,000 Hours, Demonstrated
Mechanical	2.5" H x 7.3" W x 11.0" D - Open-Frame

UNIPOWER's Custom Product Team is highly experienced in working with customers from the early stages of spec definition through the actual development and production of one-of-a-kind power solutions.

Custom products require focus from concept through production. **UNIPOWER's** Custom Products Team is staffed with project engineers, technicians, manufacturing and quality personnel totally dedicated to meeting our customers' expectations. Our rapid response team is skilled at quickly developing custom products from **UNIPOWER's** broad base of proven, standard power circuits and components.

es24445-ds-revb-0714.ai

www.unipowerco.com



UNIPOWER NORTH AMERICA
3900 Coral Ridge Drive, Coral Springs, Florida 33065, USA
Tel: +1-954-346-2442 . Fax: +1-954-340-7901 . sales-northamerica@unipowerco.com

UNIPOWER EUROPE
Parkland Business Centre, Chartwell Road, Lancing, BN15 8UE, ENGLAND
Tel: +1-954-346-2442 . Fax: +1-954-340-7901 . sales-europe@unipowerco.com