


FEATURES

- ◆ 280W in 3" x 5" footprint
- ◆ Full Medical & ITE Approvals
- ◆ Medical Body Floating (BF) rated, MOPP Type
- ◆ Main output and Standby output power ON LED indicators

THREE YEAR WARRANTY

SAFETY CERTIFICATIONS

UL60601-1 3rd Edition
 UL60950-1 2nd Edition
 CSA22.2, No. 60601-1 3rd Edition
 CSA22.2, No. 60950-1 2nd Edition
 EN60601-1 3rd Edition
 EN60950-1 2nd Edition

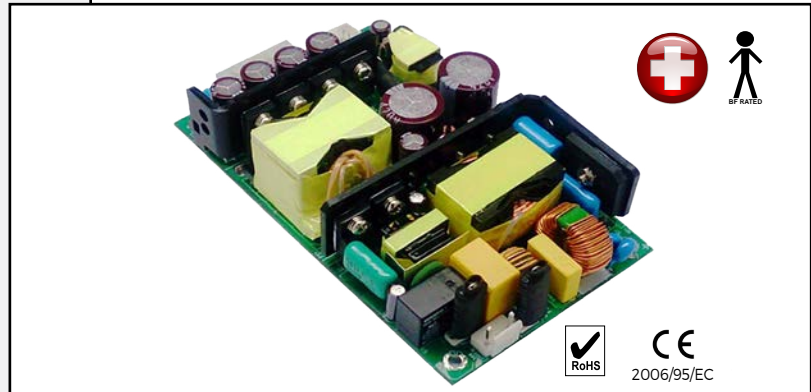

STANDARD MODELS

Model Number ^{1,3}	Output Voltage	Output Current ² (VI)	Total Regulation	Ripple & Noise (Vp-p)	Standby Supply (V2)	Fan Output (V3)
RD-280P-S12z	12V	17.5A 23.33A	±3%	150mV	5V/0.5A	12V/0.3A
RD-280P-S24z	24V	8.75A 11.66A	±3%	240mV	5V/0.5A	12V/0.3A
RD-280P-S28z	28V	7.5A 10.0A	±2%	280mV	5V/0.5A	12V/0.3A
RD-280P-S48z	48V	4.375A 5.83A	±2%	300mV	5V/0.5A	12V/0.3A
RD-280P-S54z	54V	3.88A 5.148A	±2%	400mV	5V/0.5A	12V/0.3A

NOTES:

- Output connector options: Z-T (Terminal block type, pitch 8.25mm); Suitable for all voltages. Z-M (Mini-fit type, pitch 4.2mm) or Z-C (Connector type, pitch=3.96mm); Suitable for 24V up.
- All ratings are for Convection Cooling | 18CFM Forced Cooling.
- All models have total power 210W Max. convection or 280W Max. forced air cooling.

SPECIFICATIONS

Typical at Nominal Line, Full Load and 25°C Unless Otherwise Noted. Subject to change without notice.

INPUT SPECIFICATIONS

Input Operating Range90-264VAC (see derating curve)
 Input Frequency.....47-63Hz
 Power Factor @ full load.....>0.95 @115VAC, >0.90 @230VAC
 Input Current, RMS.....<3.5A @115VAC, <2.0A @ 230VAC
 Inrush Current, cold start @ 25°C<30A Peak @ 115VAC
 <60A Peak @ 230VAC
 Input EMI Filter.....EN55022 Curve B, FCC20780 pt. 15J Curve B
 Input Protection.....Internal Fuse
 Leakage Current.....<100µA @ 264VAC

OUTPUT SPECIFICATIONS

Total Output Power, Continuous, Max.....see model table
 Total Regulation ¹.....see model table
 Ripple & Noise, Pk-Pk ².....see model table
 Holdup Time, full load @ 115VAC.....>10mS
 Minimum Load.....0A
 Overload Protection.....105-150% Full Load, Auto Recovery
 Overvoltage Protection.....Shutdown, Latch off
 Short Circuit Protection.....Auto Recovery
 5Vsb.....meets ErP 0.5W @ No load
 Remote control.....(Inhibit) function

GENERAL SPECIFICATIONS

Efficiency.....>91% typical at Full Load, 230VAC
 MTBF @ 25°C.....>200,000 Hours per Telcordia
 EMC.....EN60601-1-2, EN55024, EN 55011 Class B
 EN55022 Class B, FCC Part 15 Class B, FCC Part 18 Class B
 Safety Standards
 Medical.....UL60601-1 3rd Ed., CSA22.2 No.60601-1 3rd Ed.,
 EN60601-1 3rd Ed.
 ITE.....UL60950-1 2nd Ed., CSA22.2 No.60950-1 2nd Ed.,
 EN60650-1 2nd Ed.

ENVIRONMENTAL SPECIFICATIONS


Operating Temperature.....0°C to 70°C Ambient
 Derating (see page 3).....2.5%/°C, 51°C to 70°C
 Storage Temperature.....-20°C to 85°C
 Humidity.....0% to 95%, non-condensing
 Cooling.....Natural Convection or Forced Air

PHYSICAL SPECIFICATIONS

Format.....Open PCB
 Dimensions, inches (mm).....5 L x 3 W x 1.18 H
 (127.0 x 76.2 x 30.0)
 Weight.....0.775lbs (0.35kg)

- NOTES: 1. No load to full load, including line regulation and load regulation.
 2. 20MHz bandwidth, with a 47µF electrolytic capacitor and a 0.1µF ceramic capacitor in parallel at the output connector.

MECHANICAL SPECIFICATIONS

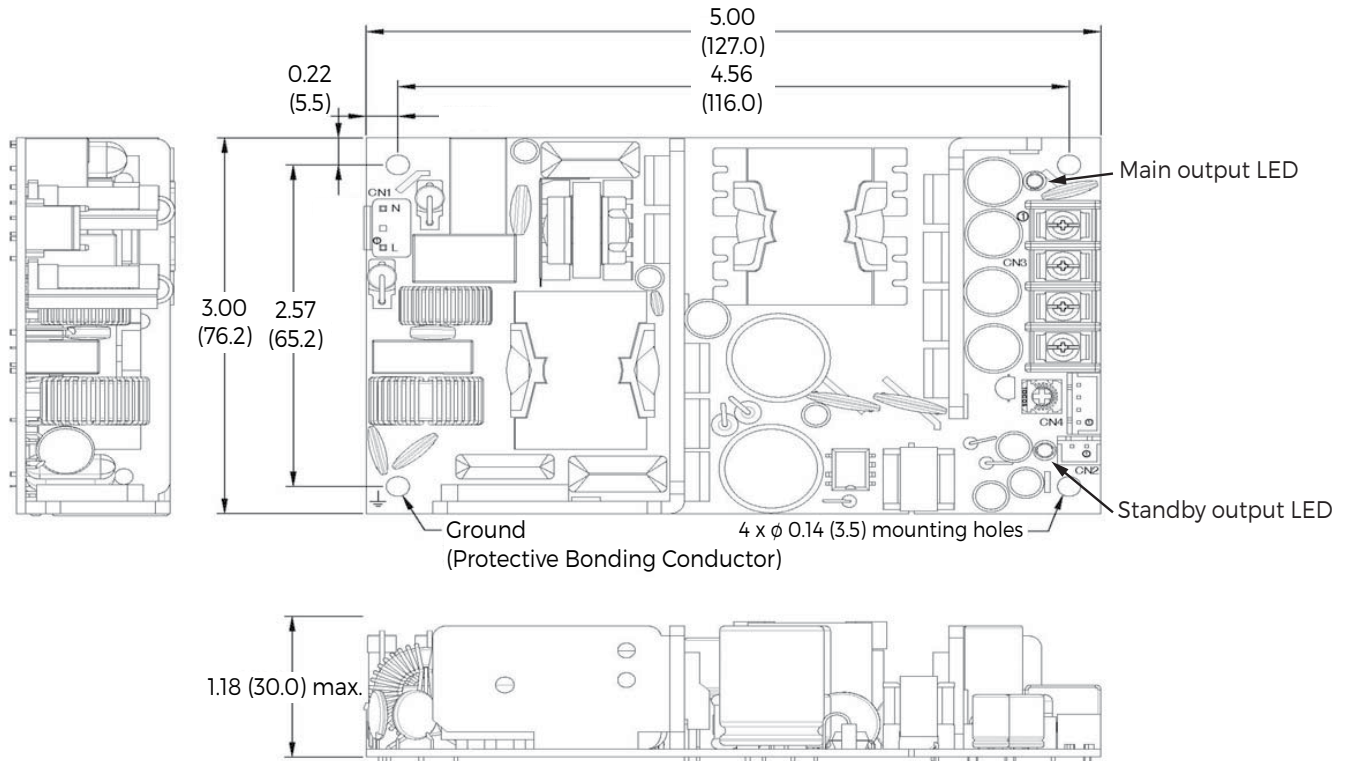




ALL DIMENSIONS IN INCHES (mm).

MAIN OUTPUT CONNECTION OPTIONS

**TERMINAL BLOCK
(option T)**

**MINIFIT
(option M)**

**CONNECTOR
(option C)**

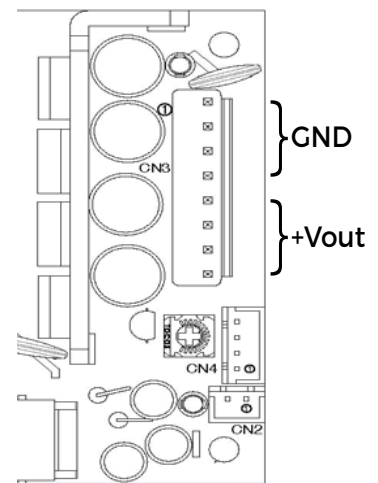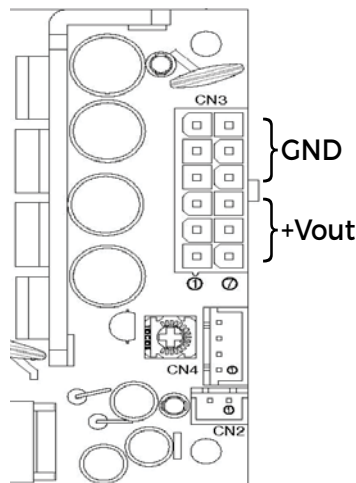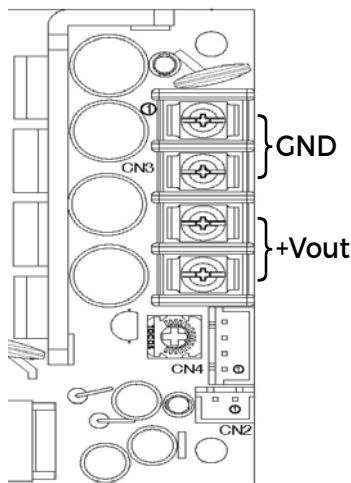

CONNECTIONS & MATING CONNECTORS

CN1: AC INPUT


PIN	FUNCTION	TYPE	MATING CONNECTOR
1	AC LINE	JST B2P3-VH pitch: 3.96mm	JST VAR-2 or equivalent
2	AC NEUTRAL		

CN2: FAN OUTPUT

PIN	FUNCTION	TYPE	MATING CONNECTOR
1	+12V FAN+	JST B2B-XH-A pitch: 2.5mm	JST XHP-2 or equivalent
2	GND FAN		

CN4: INHIBIT & STANDBY SUPPLY

PIN	FUNCTION	TYPE	MATING CONNECTOR
1	GND	JST B4B-XH-A pitch: 2.5mm	JST XHP-4 or equivalent
2	+5VSB		
3	INHIBIT		
4	GND		

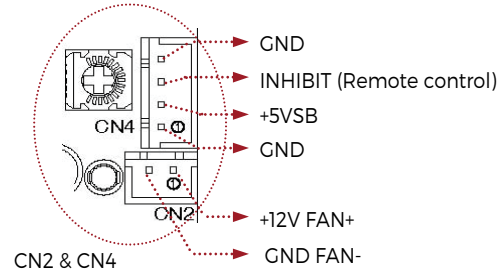

CN3: MAIN OUTPUT - OPTION T

PIN	FUNCTION	TYPE
1, 2	GND	4-Pole Terminal block pitch: 8.25mm, rate 20A/300V
3, 4	GND	

CN3: MAIN OUTPUT - OPTION M


PIN	FUNCTION	TYPE	MATING CONNECTOR
1-4	GND	JST B8P-VH-B pitch: 3.96mm	JST VHR-8N or equivalent
5-8	+Vout		

CN3: MAIN OUTPUT - OPTION C



PIN	FUNCTION	TYPE	MATING CONNECTOR
1-3	GND	12 PIN Min Fit Pitch: 4.2mm	Molex P/N 39-28-1123 or equivalent.
4-6	+Vout		

DERATING

OUTPUT POWER vs. AMBIENT TEMPERATURE

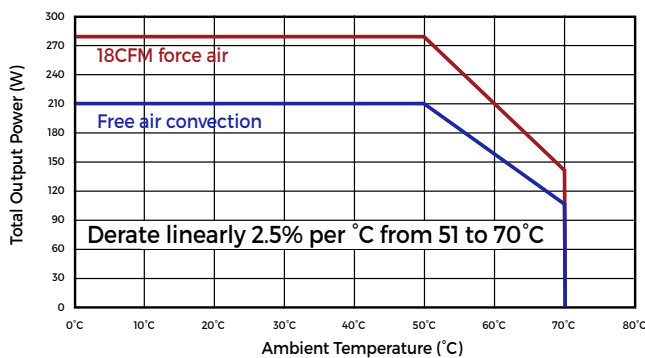

OUTPUT POWER vs. INPUT VOLTAGE

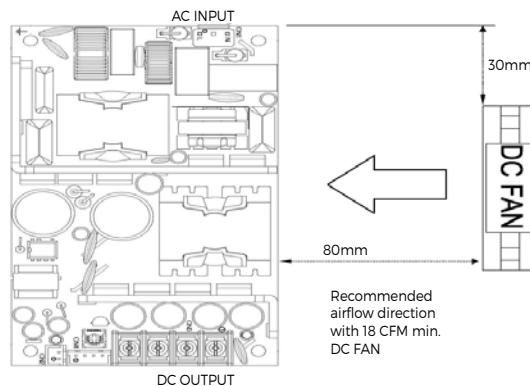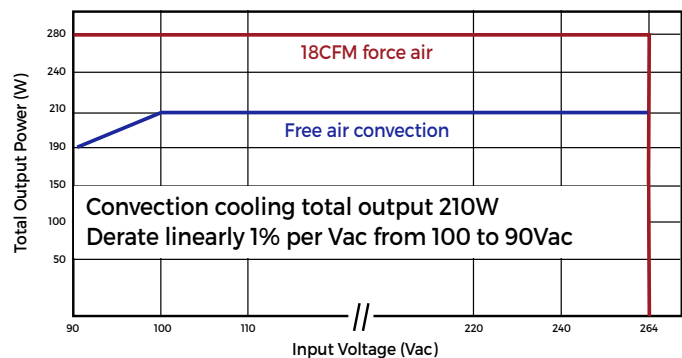

© 2017 UNIPOWER LLC

This document is believed to be correct at time of publication and Unipower LLC accepts no responsibility for consequences from printing errors or inaccuracies. All specifications subject to change without notice.